



Flexible Installation System

Support flexible stacking and hanging system with up to 10 meters high

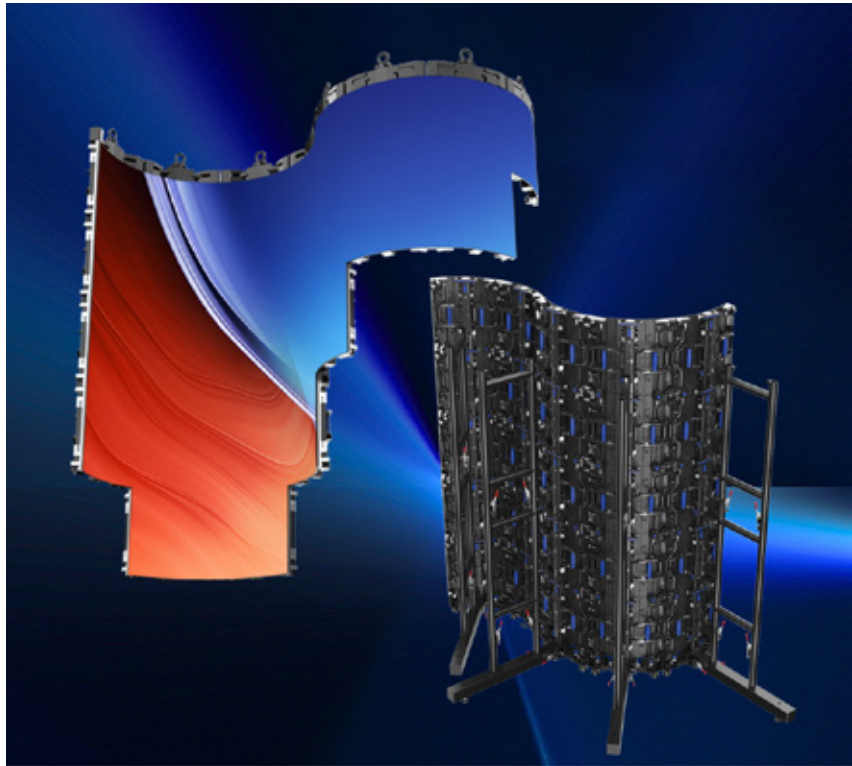

Exceptional Visual Effects

- Adopt IMD package (P1.9) for lively viewing experience without moire effect
- 7680Hz refresh rate and 16bit grayscale delivers extraordinary display effect
- Perfect in-camera performance facilitates more application like XR stages and virtual production studios

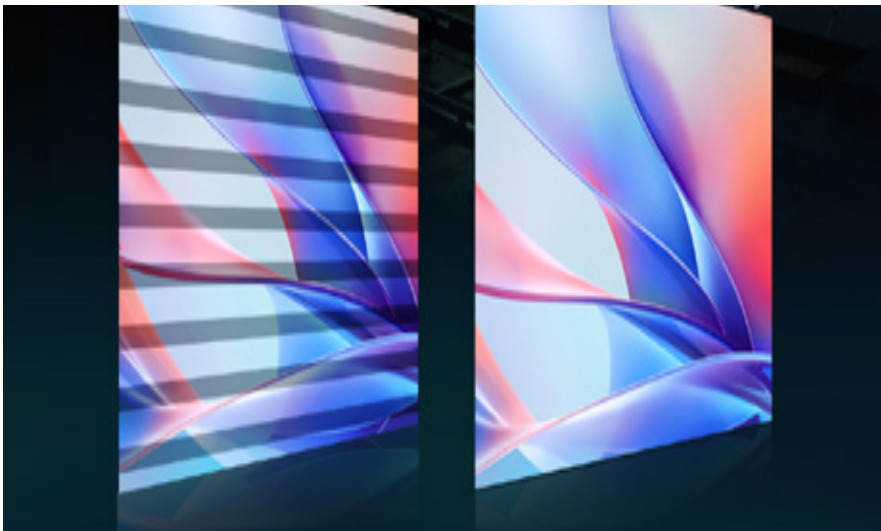

CISNE Series

Ultimate Flexible Indoor Curved Rental LED Display



Specification

| Model | BSL-CISNE 1.9 | BSL-CISNE 2.6 | BSL- CISNE 3.9 |
|----------------------------------|--------------------------------------|---------------|----------------|
| Pixel Pitch (mm) | 1.9 | 2.6 | 3.9 |
| Pixel Density (pixel/m²) | 262144 | 147456 | 65536 |
| LED Type | IMD | SMT | |
| Module Size W*H (mm) | 500*250 | | |
| Module Resolution W*H (dot) | 256*128 | 192*96 | 128*64 |
| Panel Size W*H*D (mm) | 500*500*73 | | |
| Panel Resolution W*H (dot) | 256*256 | 192*192 | 128*128 |
| Panel Material | Die-Casting Aluminum | | |
| Panel Weight (Kg/pc) | 8 | | |
| Brightness (cd/m²) | 900-1000 | 900-1500 | 900-1200 |
| Viewing Angle (H/V) | 160°/160° | | |
| Gray Scale (bit) | 14/16 | | |
| Refresh Rate (Hz) | 7680 | 3840/7680 | 3840 |
| Contrast Ratio | 8000:1 | 8000:1 | 6000:1 |
| Color Temperature (K) | 2000~10000 (Adjustable) | | |
| Voltage (V) | AC 110-220 | | |
| Maximum Power Consumption (W/m²) | 700 | 480 | 480 |
| Average Power Consumption (W/m²) | 175 | 120 | 120 |
| Serviceability | Rear | | |
| IP Rating | IP20 | | |
| Lifespan (Hours) | 100000 | | |
| Certificates | CB/EMC/LVD/RoHs/ETL/FCC/Tension(TUV) | | |

*Above parameters are for reference only. For more details, please contact our sales team. All rights reserved.

Email: USA info@bigshineled.com | DR informacion@bigshinelasamericas.com.do
Phone: USA (845) 219-5548 | DR (809) 373-6635
Websites: bigshineled.com | bigshinelasamericas.com.do



Ultra-slim & Light



Angle Adjustment



Curved Splicing



Mixed Splicing



Install & Maintain With Ease




Exceptional Visual effects



Mixed Splicing, More Possibilities

Mixed splicing with Pilot Pro Series, Dazzle IV Series, E-Corner rental displays for more creativity

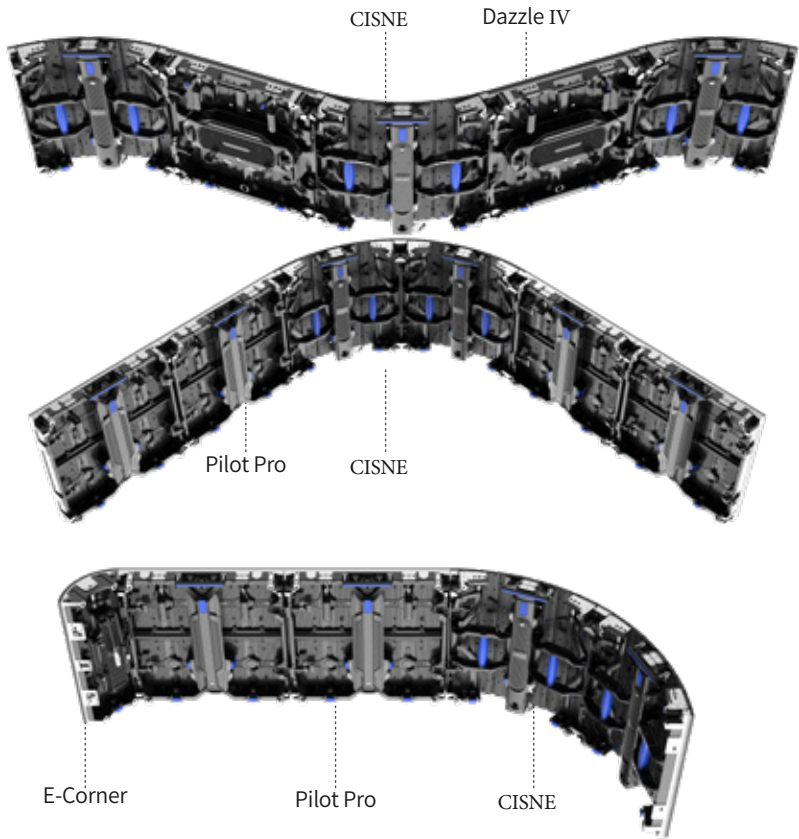


CISNE Series

Ultimate Flexible Indoor Curved Rental LED Display


Ultimate Flexible Curved Panel

- Unique design allows single panel to curve and curve flexibly
- 9 adjustable scales grant each panel to be bent up to 45° inward and outward

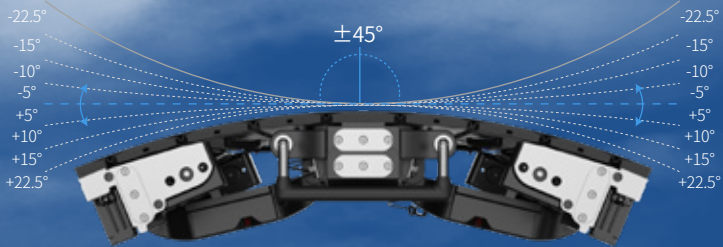

Inventive Smooth Curved Splicing Solution

- Support curved shapes such as wave, cylinder, right-angle corner
- Guarantee impressively smooth and natural curvature compared with regular LED displays

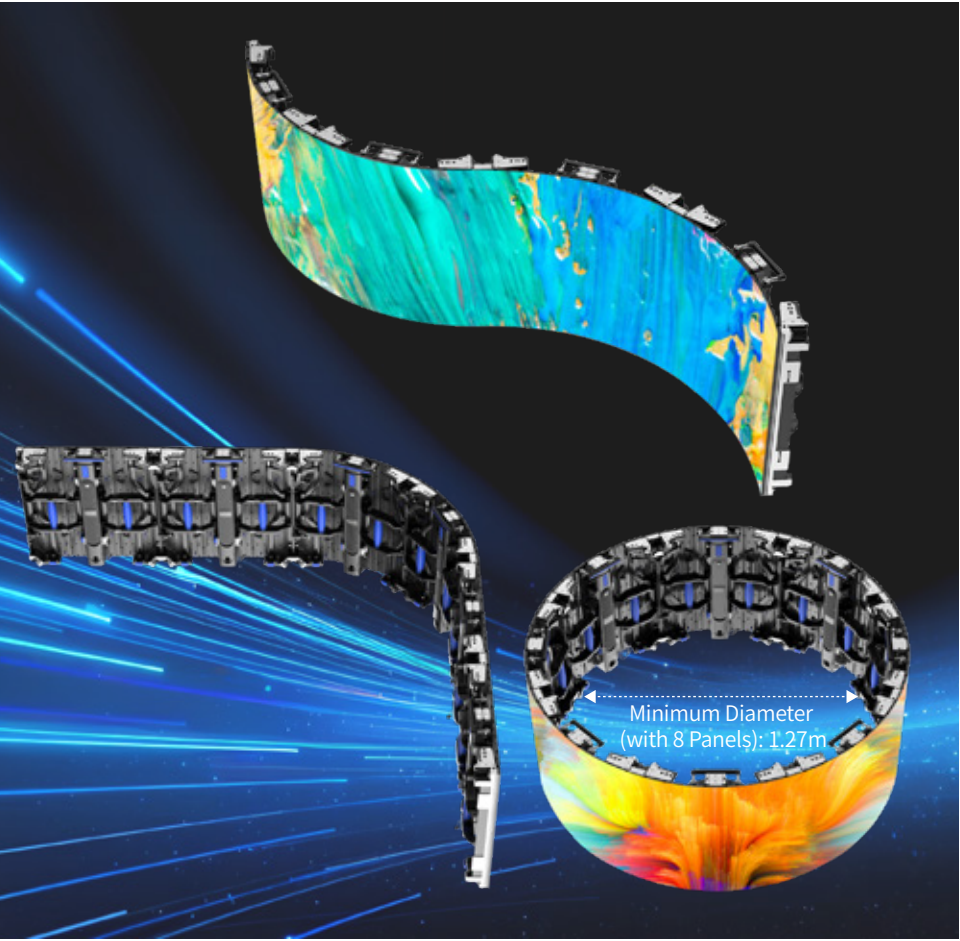

Quick Installation, Easy Maintenance

- Ultra-slim & light die-casting aluminum panels with each weighing 8 kg, 73mm thinness expedite fast installation with high flatness
- Handles with adjustable arcs, auxiliary alignment magnets, up-down locks, left-right locks are equipped for fast installation
- Modules and power boxes support full rear maintenance

