

Ultra-Slim & Light

112mm ultra-thin cabinets, weighing just 29kg/m², cut transport and labor costs



Fast Installation & Maintenance

Lightweight panels with a unique fast interlock allow quick installation and removal, while front and rear access improve repair efficiency



Specifications

Model	SLG-III 6.25	SLG-III 8.3	SLG-III 10	SLG-III 12.5
Pixel Pitch (mm)	6.25	8.3	10	12.5*10
Pixel Density (dot/m²)	25600	14400	10000	8000
LED Type	SMD			
Module Size W×H (mm)	500*300			
Module Resolution W×H (pixel)	80*48	60*36	50*30	40*30
Panel Size W×H (mm)	2000*900*112			
Panel Resolution W×H (dot)	320*144	240*108	200*90	160*90
Panel Material	Aluminum			
Weight (Kg/m²)	29			
Brightness (cd/m²)	6000			
Brightness Adjustment	Programmable/Automatic/Manual			
Viewing Angle (H/V)	160°/120°			
Gray Scale (bit)	16			
Refresh Rate (Hz)	7680			
Frame Rate (Hz)	50 / 60			
Contrast Ratio	6000:1			
Color Temperature (K)	2000~10000 (Adjustable)			
Voltage (V)	AC 100-240			
Maximum Power Consumption (W/m²)	780			
Average Power Consumption (W/m²)	260			
Serviceability	Front/Rear			
IP Rating	IP65			
LED Lifetime (Hours)	100000			

\*Above parameters are for reference only. For more details, please contact our sales team.

Email: USA [info@bigshineled.com](mailto:info@bigshineled.com) | DR [informacion@bigshinelasamericas.com.do](mailto:informacion@bigshinelasamericas.com.do)  
Phone: USA (845) 219-5548 | DR (809) 373-6635  
Websites: [bigshineled.com](http://bigshineled.com) | [bigshinelasamericas.com](http://bigshinelasamericas.com).



BSL-SLG III Series  
Outdoor Stadium Display

Stadium Perimeter LED Display



Ultra-Slim & Light



Convenient Dolly



Fast Interlock



UEFA Standards Compliance



High Stability



Front/Rear Maintenance

Your Trustworthy Display Solution Provider



# BSL-SLG-III Series

## UEFA Compliant Design




### Protection for Players

Rubber pads and a soft mask protect athletes and the LED display, while a special design allows the perimeter screen to slide aside for emergency access.



Top rubber pads prevent secondary injuries from the collision.

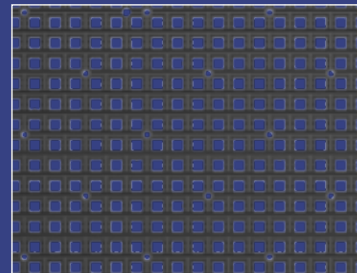

Soft masks can reduce collision damage.



The bottom gap is filled with baffles to prevent foot intrusion.



The bottom foot brace is covered with rubber soft pads to prevent injury from sharp objects.



### Dollies for Fast Installation

SLG-III Series supports dollies the same size as the cabinet for fast transportation. Moreover, two dollies allow up-down stacking to save space and one-press disassembly to save installation time.



### Never Blackout

N+1 power backup and receiving card dual backup can keep the screen running steadily and efficiently.



N+1 power backup

### Superb Picture Quality

The 7680Hz high refresh rate and 6000:1 contrast ratio ensure consistently smooth playback. 6000nits brightness and 140° horizontal view remain perfect in-camera visuals during live streaming or broadcast.



### Waterproof Protection

The screen's front and back are IP65-rated to provide all-around protection for all weather conditions.

